



NORDIC CCM0330 SERIES

MODULAR CUBED ICE MAKER



Ice maker shown on B430AP bin

Protected by Agion



FEATURES

High-yield – Produces up to 361 lbs. (164 Kgs.) of ice/day

Durable – Constructed from corrosion-resistant stainless steel



Antimicrobial – Built-in Agion Antimicrobial product protection effective against mold, mildew, and fungus

Small footprint – Ultra low-profile - only 20" (508 mm) tall

Smart – Harvest assist reduces utility consumption

Customizable – Choice of full or half cube size

Easy to maintain – No air filter to clean or replace

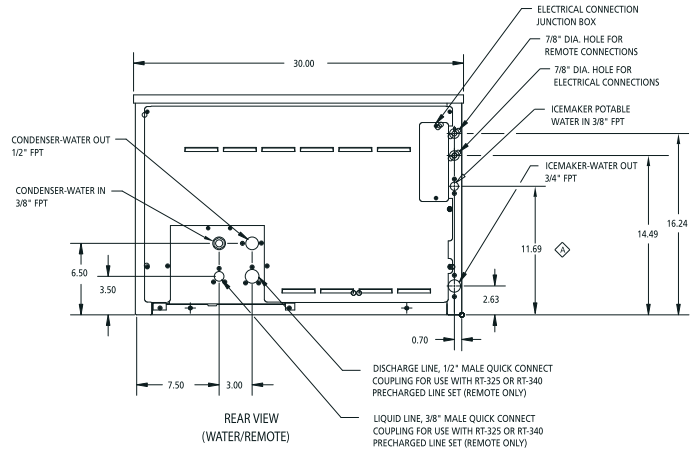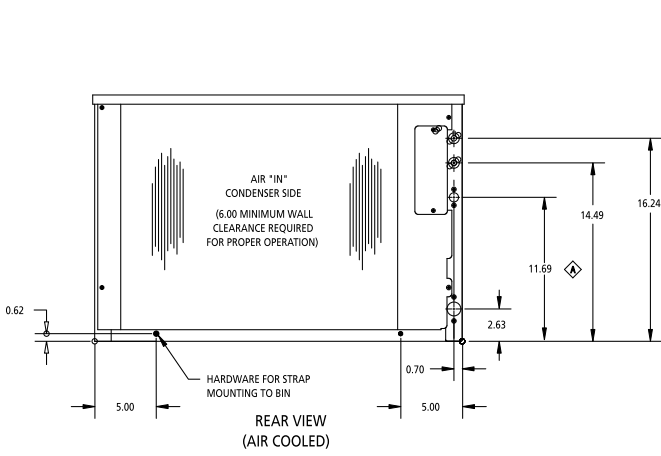


| MODEL NO. | Cond. Unit | Ice Prod. per 24 hrs. at 70° Air / 50° Water lbs. (Kgs.) | Ice Prod. per 24 hrs. at 90° Air / 70° Water lbs. (Kgs.) | Water Used-Gals. (Ltrs.) per 100 lbs. of ice 90° Air / 70° Water | | Kilowatts Used per 100 lbs. of ice 90° Air / 70° Water | Heat Rejection (Btuh) | Electrical Rating | Min. Circuit Amp. |
|------------|------------|--|--|--|-----------|--|-----------------------|-------------------|-------------------|
| | | | | Ice Prod. Use | Cond. Use | | | | |
| CCM0330A*1 | Air | 336 (153) | 253 (115) | 35.8 | n/a | 7.9 | 6248 | 115/60/1 | 13.3 |
| CCM0330WH1 | Water | 333 (151) | 275 (125) | 34.5 | 131 | 6.1 | 5855 | 115/60/1 | 10.8 |
| CCM0330W*5 | Water | 344 (155) | 296 (135) | 34.1 | 114 | 6.0 | 6265 | 230/50/1 | 6.6 |

* Represents cube size. For full cube substitute an "F", for half cube substitute an "H". See Bin specification sheet for information on Storage bins.

OPERATING LIMITS

| | |
|---|---------------------------|
| Ambient Temp. Range Air & Water | 50° - 110°F (10° - 43°C) |
| Water Temp. Range | 40° - 100°F (4.5° - 38°C) |
| Water Pressure Ice Maker Water in | Min. 20 psi (1.4 bar) |
| | Max. 60 psi (4.1 bar) |
| Condenser Inlet Water (Water cooled only) | Min. 20 psi (1.4 bar) |
| | Max. 60 psi (4.1 bar) |



| Cube Size: | Width | Depth | Height |
|------------|-------------|-------------|-------------|
| Full | 7/8" (22mm) | 7/8" (22mm) | 7/8" (22mm) |
| Half | 3/8" (10mm) | 7/8" (22mm) | 7/8" (22mm) |

TECHNICAL SPECIFICATIONS

NUMBER OF WIRES..... 3
 MAX. FUSE SIZE..... 15
 SHIPPING WEIGHT LBS (KGS.) .. 150 (68)

AGENCY LISTINGS..... LISTED

