



NORDIC CCM0522 SERIES

MODULAR CUBED ICE MAKER




Ice maker shown on B322AP bin

Protected by Agion



FEATURES

- High-yield** – Produces up to 559 lbs. (254 Kgs.) of ice/day
- Durable** – Constructed from corrosion-resistant stainless steel
- Antimicrobial** – Built-in Agion Antimicrobial product protection effective against mold, mildew, and fungus
- Small footprint** – Ultra low-profile - only 23" (584 mm) tall and 22" (558 mm) wide
- Smart** – Harvest assist reduces utility consumption
- Customizable** – Choice of full or half cube size
- Easy to maintain** – No air filter to clean or replace

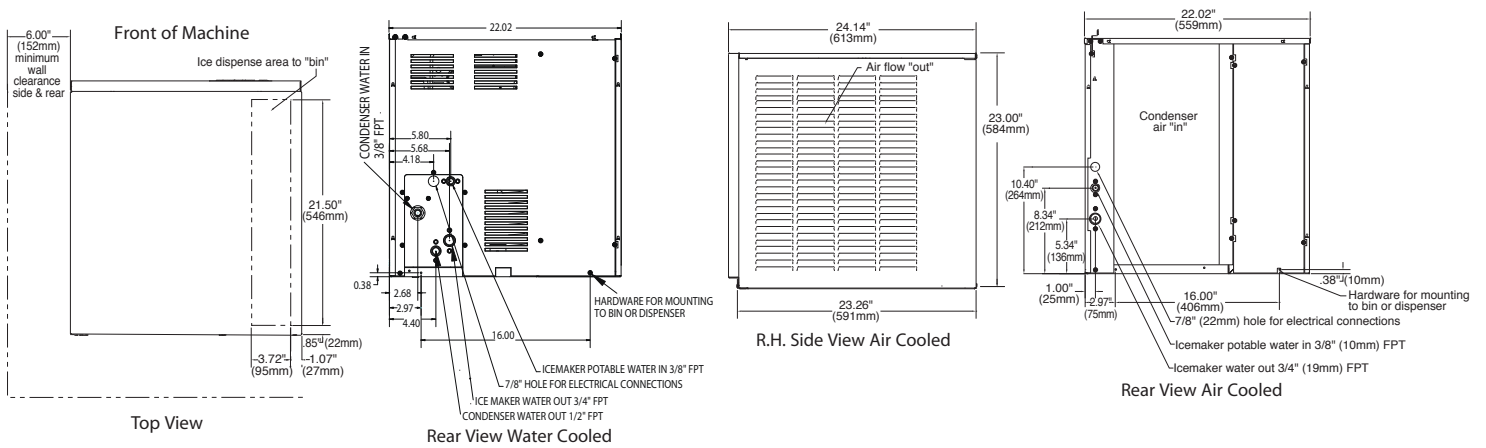


MODEL NO.	Cond. Unit	Ice Prod. per 24 hrs. at		Water Used-Gals. (Ltrs.) per 100 lbs. of ice 90° Air / 70° Water		Kilowatts Used per 100 lbs. of ice 90° Air / 70° Water	Heat Rejection (Btuh)	Electrical Rating	Min. Circuit Amp.	Fuse Size
		50° Air / 70° Water lbs. (Kgs.)	90° Air / 70° Water lbs. (Kgs.)	Ice Prod. Use	Cond. Use					
CCM0522A*1	Air	520 (236)	370 (168)	25.4	n/a	5.9	7753	115/60/1	16.0	20
CCM0522WH1	Water	527 (240)	442 (201)	23.2	128	4.2	7852	115/60/1	11.8	15
CCM0522A*5	Air	559 (254)	404 (184)	25.1	n/a	6.1	8617	220-240/50/1	9.2	16

See Bin specification sheet for information on Storage bins
 • Represents cube size - for full cube substitute an "F" for half cube substitute an "H".
 Dispenser-mounted units require bin thermostat kit #1051020-02.
 Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.

OPERATING LIMITS

Ambient Temp. Range Air & Water	50° - 110°F (10° - 43°C)
Water Temp. Range	40° - 110°F (4.5° - 43°C)
Water Pressure Ice Maker Water in	Min. 20 psi (1.4 bar)
	Max. 60 psi (4.1 bar)
Condenser Inlet Water (Water cooled only)	Min. 20 psi (1.4 bar)
	Max. 60 psi (4.1 bar)

Dimensions and Air Flow

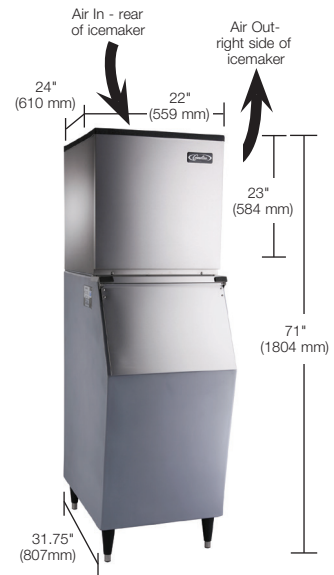


TECHNICAL SPECIFICATIONS

NUMBER OF WIRES 3

SHIPPING WEIGHT LBS (KGS.) . . Air: 165 (75)
 Water: 175 (80)

AGENCY LISTINGS



Cube Size:	Width	Depth	Height
Full	7/8" (22mm)	7/8" (22mm)	7/8" (22mm)
Half	3/8" (10mm)	7/8" (22mm)	7/8" (22mm)

